

ON-PREMISES PRODUCT OVERVIEW

Cabinet hardmount washer-extractors

Softmount washer-extractors

Tumble dryers

Stack tumble dryers

Front load washers

Top load washers

Single dryers

Stack washer/dryers



CABINET HARDMOUNT WASHER-EXTRACTORS

Hardmount washer-extractors* are the industry standard for hotels, healthcare facilities and other ground-floor laundries. These heavy-duty units are secured to the concrete floor and have a proven record of reliability, longevity and superior wash results.

Huebsch machines are also designed to extend linen life, reduce utility usage and maximize productivity. Our durable construction guarantees your washer-extractor will be in service for years to come, while our high G-Force extraction removes more water from each load, reducing energy costs and shortening drying times.

CABINET HARDMOUNT WASHER-EXTRACTOR CONTROLS



Galaxy™ with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 200 G-Force extraction speeds reduce drying time and utility consumption.


FEATURES

- Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity and 11% on water while maximizing cleaning power.
- Computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels.
- Seals and bearings assembly: Two triple-lip seals and an excluder-face seal for seven layers of water protection.
- Large door design makes loading and unloading fast and easy.
- Available in 20 lb (9 kg), 30 lb (13.6 kg), 40 lb (18 kg), 60 lb (27 kg), 80 lb (36 kg) and 100 lb (45 kg) capacities.



* Not all models are available in all markets. In order to highlight key details, machine images do not adhere to a standard scale.

On-Premises 20-lb Hardmount Washer-Extractor

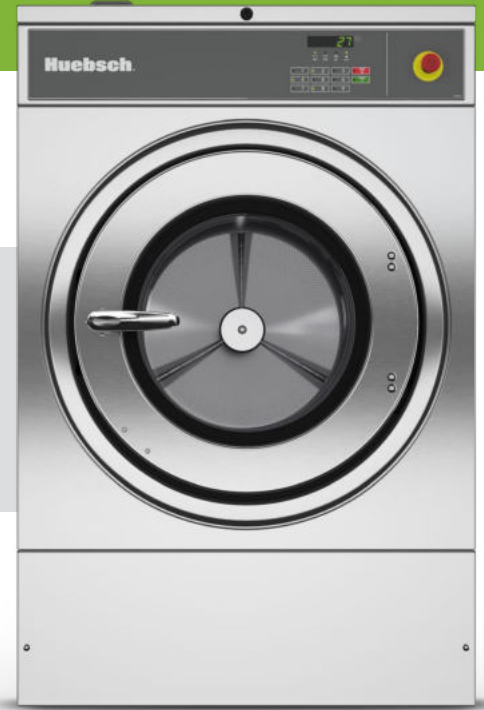

Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **20-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG020
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		20 (9)
OVERALL WIDTH - in (mm)		26 (660)
*OVERALL DEPTH - in (mm)		30 1/4 (767)
OVERALL HEIGHT - in (mm)		43 (1092)
CYLINDER DIAMETER - in (mm)		21 (533)
CYLINDER DEPTH - in (mm)		13 3/4 (349)
CYLINDER VOLUME - cu. ft. (liters)		2.76 (78.1)
DOOR OPENING SIZE - in (mm)		11 5/8 (295)
DOOR BOTTOM TO FLOOR - in (mm)		14 3/8 (365)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		4 1/2 (114)
MOTOR POWER CONSUMPTION - hp (kw)		1 (.75)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	37 (0.4)
	Wash	51 (.8)
	Distribution	92 (2.5)
	Very Low	301 (27)
	Low	518 (80)
	Medium	580 (100)
	** High	648 (120)
	**Very High	710 (150)
	**Ultra High	819 (200)
*** VOLTAGE/ CIRCUIT BREAK- ER - FLA	B	120/60/1 15-8
	X	200-208/220- 240/50/60/1/3 15-4 (1 Ph) 15-3 (3 Ph)
	N	440-480/50/60/3 15-2
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 28 (711)
		Depth 33 13/16 (859)
		Height 48 7/16 (1229)
NET WEIGHT - lb (kg)		335 (152)
SHIPPING WEIGHT - lb (kg)		365 (166)
****AGENCY APPROVALS		CSA/CE

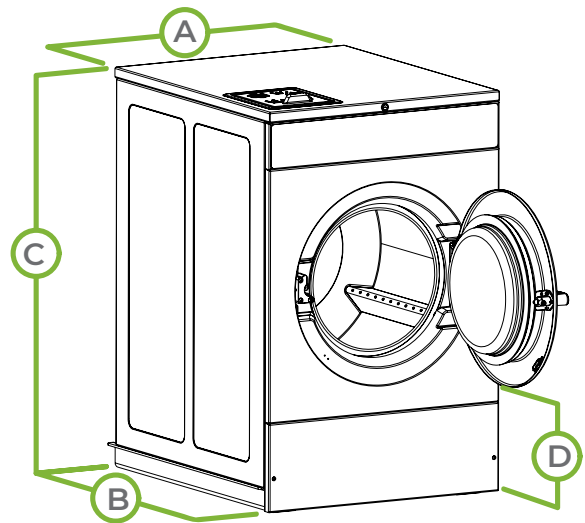

MODEL	HCT020
A. OVERALL WIDTH - in (mm)	26 (660)
B. *OVERALL DEPTH - in (mm)	30 1/4 (767)
C. OVERALL HEIGHT - in (mm)	43 (1092)
D. DOOR BOTTOM TO FLOOR - in (mm)	14 3/8 (365)

*Overall depth includes vacuum breaker to door handle.

**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

On-Premises 30-lb Hardmount Washer-Extractor



Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **30-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG030
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		30 (13.6)
OVERALL WIDTH - in (mm)		29 (737)
*OVERALL DEPTH - in (mm)		34 9/16 (878)
OVERALL HEIGHT - in (mm)		45 (1142)
CYLINDER DIAMETER - in (mm)		24 (610)
CYLINDER DEPTH - in (mm)		16 (406)
CYLINDER VOLUME - cu. ft. (liters)		4.19 (118)
DOOR OPENING SIZE - in (mm)		14 5/16 (364)
DOOR BOTTOM TO FLOOR - in (mm)		14 (356)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		4 1/2 (114)
MOTOR POWER CONSUMPTION - hp (kw)		1 (.75)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	34 (0.4)
	Wash	48 (.8)
	Distribution	86 (2.5)
	Very Low	282 (27)
	Low	485 (80)
	Medium	542 (100)
	** High	606 (120)
	**Very High	664 (150)
	**Ultra High	766 (200)
*** VOLTAGE/ CIRCUIT BREAKER - FLA	B	120/60/1 20-16
	X	200-208/220- 240/50/60/1/3 15-6 (1 Ph) 15-4 (3 Ph)
	N	440-480/50/60/3 15-3
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 31 1/2 (800)
		Depth 38 5/16 (973)
		Height 51 5/16 (1303)
NET WEIGHT - lb (kg)		460 (209)
SHIPPING WEIGHT - lb (kg)		495 (225)
****AGENCY APPROVALS		CSA/CE

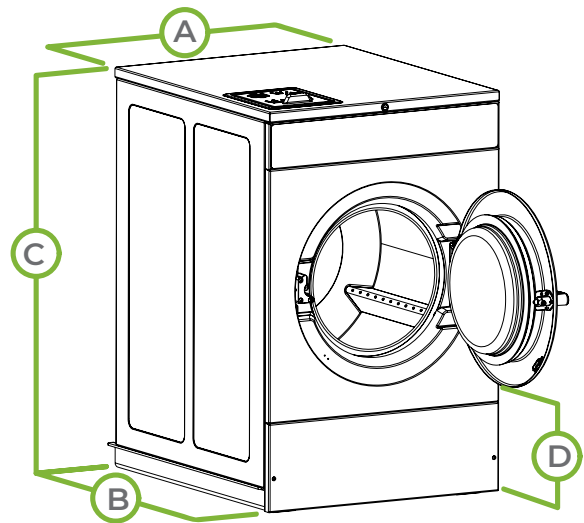

MODEL	HCT030
A. OVERALL WIDTH - in (mm)	29 (737)
B. *OVERALL DEPTH - in (mm)	34 9/16 (878)
C. OVERALL HEIGHT - in (mm)	45 (1142)
D. DOOR BOTTOM TO FLOOR - in (mm)	14 (356)

*Overall depth includes vacuum breaker to door handle.

**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

On-Premises **40-lb** Hardmount Washer-Extractor



Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **40-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG040
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		40 (18)
OVERALL WIDTH - in (mm)		30 5/8 (778)
*OVERALL DEPTH - in (mm)		39 3/4 (1009)
OVERALL HEIGHT - in (mm)		47 1/4 (1199)
CYLINDER DIAMETER - in (mm)		26 1/4 (667)
CYLINDER DEPTH - in (mm)		20 1/4 (514)
CYLINDER VOLUME - cu. ft. (liters)		6.34 (180)
DOOR OPENING SIZE - in (mm)		16 1/4 (413)
DOOR BOTTOM TO FLOOR - in (mm)		14 1/2 (368)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		4 13/16 (122)
MOTOR POWER CONSUMPTION - hp (kw)		2 (1.7)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	33 (0.4)
	Wash	46 (.8)
	Distribution	82 (2.5)
	Very Low	269 (27)
	Low	464 (80)
	Medium	518 (100)
	** High	579 (120)
	**Very High	635 (150)
	**Ultra High	733 (200)
*** VOLTAGE/ CIRCUIT BREAKER - FLA	B	120/60/1 20-16
	X	200-208/220-240/50/60/1/3 15-7 (1 Ph) 15-4 (3 Ph)
	N	440-480/50/60/3 15-3
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 32 1/2 (826)
		Depth 43 1/2 (1105)
		Height 53 5/8 (1361)
NET WEIGHT - lb (kg)		550 (249)
SHIPPING WEIGHT - lb (kg)		590 (268)
****AGENCY APPROVALS		CSA/CE

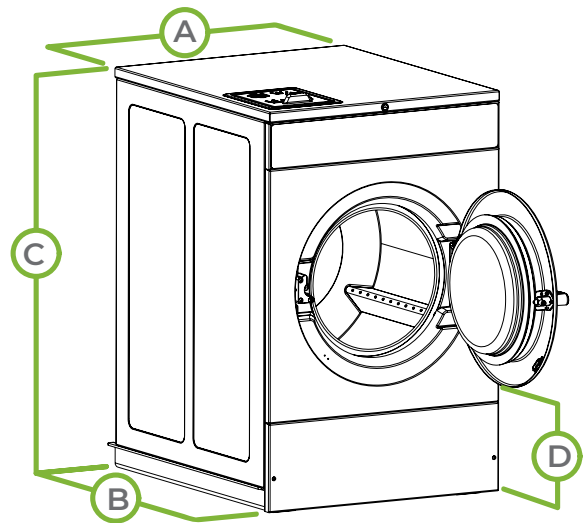

MODEL	HCT040
A. OVERALL WIDTH - in (mm)	30 5/8 (778)
B. *OVERALL DEPTH - in (mm)	39 3/4 (1009)
C. OVERALL HEIGHT - in (mm)	47 1/4 (1199)
D. DOOR BOTTOM TO FLOOR - in (mm)	14 1/2 (368)

*Overall depth includes vacuum breaker to door handle.

**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

On-Premises 60-lb Hardmount Washer-Extractor



Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **60-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG060
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		60 (27)
OVERALL WIDTH - in (mm)		34 1/16 (865)
*OVERALL DEPTH - in (mm)		42 9/16 (1081)
OVERALL HEIGHT - in (mm)		49 7/8 (1267)
CYLINDER DIAMETER - in (mm)		30 (762)
CYLINDER DEPTH - in (mm)		22 (559)
CYLINDER VOLUME - cu. ft. (liters)		9.0 (255)
DOOR OPENING SIZE - in (mm)		16 1/4 (413)
DOOR BOTTOM TO FLOOR - in (mm)		14 15/16 (379)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		4 11/16 (119)
MOTOR POWER CONSUMPTION - hp (kw)		3 (2.2)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	31 (0.4)
	Wash	43 (.8)
	Distribution	77 (2.5)
	Very Low	252 (27)
	Low	434 (80)
	Medium	485 (100)
	** High	542 (120)
	**Very High	594 (150)
	**Ultra High	686 (200)
*** VOLTAGE/ CIRCUIT BREAKER - FLA	X	200-208/220- 240/50/60/1/3 15-10 (1 Ph) 15-6 (3 Ph)
	N	440-480/50/60/3 15-4
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 37 1/2 (953)
		Depth 46 15/16 (1191)
		Height 56 5/16 (1430)
NET WEIGHT - lb (kg)		695 (315)
SHIPPING WEIGHT - lb (kg)		745 (338)
****AGENCY APPROVALS		CSA/CE

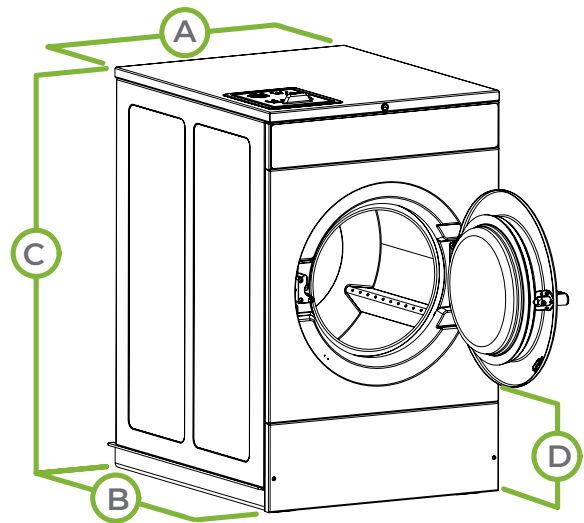

MODEL	HCT060
A. OVERALL WIDTH - in (mm)	34 1/16 (865)
B. *OVERALL DEPTH - in (mm)	42 9/16 (1081)
C. OVERALL HEIGHT - in (mm)	49 7/8 (1267)
D. DOOR BOTTOM TO FLOOR - in (mm)	14 15/16 (379)

*Overall depth includes vacuum breaker to door handle.


**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

On-Premises 80-lb Hardmount Washer-Extractor

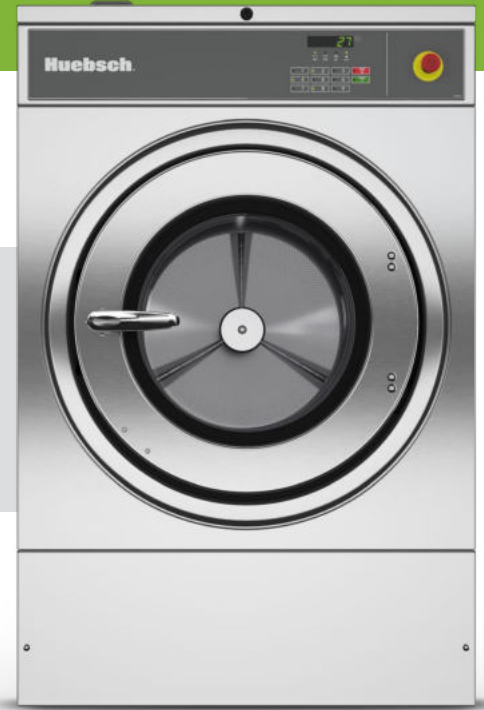

Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **80-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG080
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		80 (36)
OVERALL WIDTH - in (mm)		41 1/2 (1054)
*OVERALL DEPTH - in (mm)		48 1/2 (1234)
OVERALL HEIGHT - in (mm)		56 3/16 (1426)
CYLINDER DIAMETER - in (mm)		36 (916)
CYLINDER DEPTH - in (mm)		22 (559)
CYLINDER VOLUME - cu. ft. (liters)		12.4 (354)
DOOR OPENING SIZE - in (mm)		18 1/2 (470)
DOOR BOTTOM TO FLOOR - in (mm)		17 15/16 (455)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		5 3/4 (145)
MOTOR POWER CONSUMPTION - hp (kw)		5 (3.7)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	28 (0.4)
	Wash	39 (.8)
	Distribution	70 (2.5)
	Very Low	230 (27)
	Low	396 (80)
	Medium	443 (100)
	** High	495 (120)
	**Very High	542 (150)
	**Ultra High	626 (200)
*** VOLTAGE/ CIRCUIT BREAKER - FLA	X	200-208/220- 240/50/60/1/3 15-12 (1 Ph) 15-8 (3 Ph)
	N	440-480/50/60/3 15-5
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 44 (1118)
		Depth 54 1/2 (1384)
		Height 58 5/8 (1488)
NET WEIGHT - lb (kg)		1210 (549)
SHIPPING WEIGHT - lb (kg)		1260 (572)
****AGENCY APPROVALS		CSA/CE

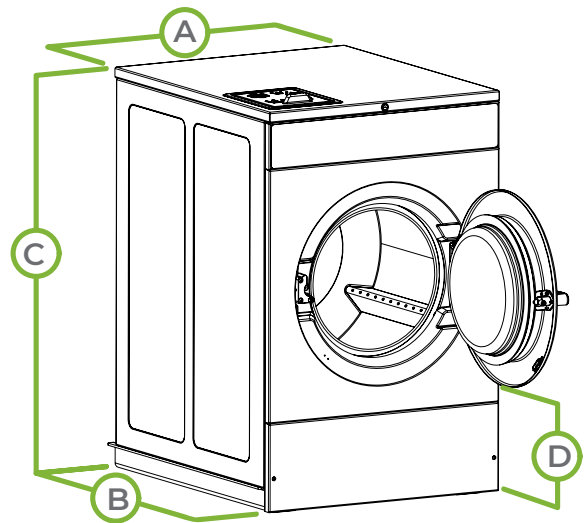

MODEL	HCT080
A. OVERALL WIDTH - in (mm)	41 1/2 (1054)
B. *OVERALL DEPTH - in (mm)	48 1/2 (1234)
C. OVERALL HEIGHT - in (mm)	56 3/16 (1426)
D. DOOR BOTTOM TO FLOOR - in (mm)	17 15/16 (455)

*Overall depth includes vacuum breaker to door handle.


**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

On-Premises **100-lb** Hardmount Washer-Extractor

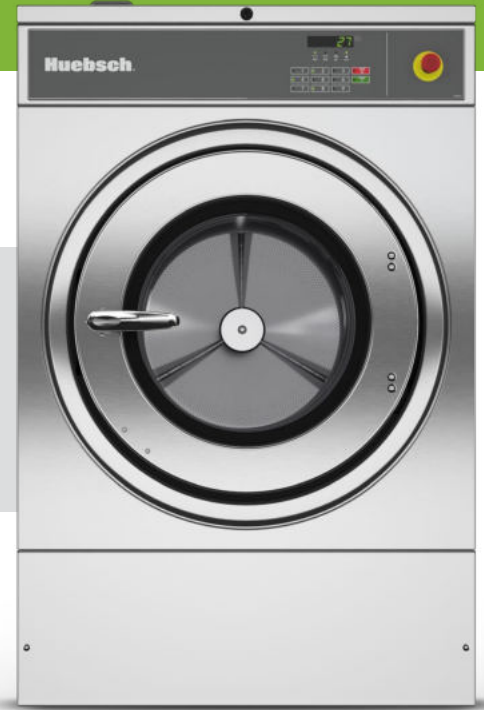

Maximized throughput, minimized costs. That's what busy on-premises laundries demand. Huebsch® hardmount washer-extractors deliver those results, while producing exceptional finished wash quality. In addition, their durability ensures the machines will be consistent laundry performers for years to come.

Strength

Our computer-optimized, heavy-duty frame is lighter, lasts longer, balances loads more efficiently, and reduces sound and vibration levels. Huebsch washer-extractors also boast two triple-lip seals and an excluder-face seal for seven layers of bearing protection.

Power

Proprietary inverter-drive technology provides smooth, reliable power, saving you 33% on electricity while maximizing cleaning power. Our inverter also exerts 100 G-Force extraction to remove more moisture from loads and reduce drying time.

Performance

Available in a variety of capacities, including 20 lb, 30 lb, 40 lb, 60 lb, 80 lb and 100 lb capacities, Huebsch cabinet hardmount washer-extractors also offer a variety of control options to match your operation's unique requirements.




Galaxy™ 400 with eBoost™

Customize your washing power with the ability to choose between three water levels while eliminating wasted water with advanced leak detection. PC programming, audit data retrieval and advanced diagnostics save time, while 100 G-Force extraction speeds reduce drying time and utility consumption.

On-Premises **100-lb Hardmount Washer-Extractor** Specifications

MODEL		HCG100
CONTROL OPTION		Galaxy 400
CAPACITY - lb (kg)		100 (45)
OVERALL WIDTH - in (mm)		41 1/2 (1054)
*OVERALL DEPTH - in (mm)		52 1/2 (1336)
OVERALL HEIGHT - in (mm)		56 3/16 (1426)
CYLINDER DIAMETER - in (mm)		36 (916)
CYLINDER DEPTH - in (mm)		26 (610)
CYLINDER VOLUME - cu. ft. (liters)		13.5 (434)
DOOR OPENING SIZE - in (mm)		18 1/2 (470)
DOOR BOTTOM TO FLOOR - in (mm)		17 15/16 (455)
WATER INLET CONNECTION - in (mm)		2 x 3/4 (19)
DRAIN DIAMETER - in (mm)		1 x 3 (76)
DRAIN HEIGHT TO FLOOR - in (mm)		5 3/4 (145)
MOTOR POWER CONSUMPTION - hp (kw)		5 (3.7)
TOTAL # OF SPEEDS		6, 9
CYLINDER SPEEDS - RPM (G-FORCE)	Gentle	28 (0.4)
	Wash	39 (.8)
	Distribution	70 (2.5)
	Very Low	230 (27)
	Low	396 (80)
	Medium	443 (100)
	** High	495 (120)
	**Very High	542 (150)
	**Ultra High	568 (165)
*** VOLTAGE/ CIRCUIT BREAKER - FLA	X	200-208/220- 240/50/60/1/3 20-16 (1 Ph) 15-10 (3 Ph)
	N	440-480/50/60/3 15-7
SHIPPING DIMENSIONS APPROX. - in (mm)		Width 44 (1118)
		Depth 58 1/2 (1486)
		Height 58 5/8 (1488)
NET WEIGHT - lb (kg)		1260 (572)
SHIPPING WEIGHT - lb (kg)		1310 (594)
****AGENCY APPROVALS		CSA/CE

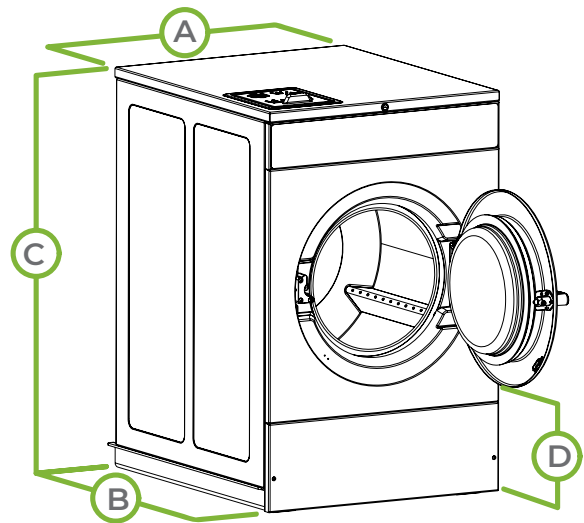

MODEL	HCT100
A. OVERALL WIDTH - in (mm)	41 1/2 (1054)
B. *OVERALL DEPTH - in (mm)	52 1/2 (1336)
C. OVERALL HEIGHT - in (mm)	56 3/16 (1426)
D. DOOR BOTTOM TO FLOOR - in (mm)	17 15/16 (455)

*Overall depth includes vacuum breaker to door handle.

**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

****Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.T.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.