




INDUSTRIAL CYLINDER HEATED DRYING IRONERS WITH INTEGRATED FEEDING AND LENGTH FOLDING

FCIFF500

FEATURES

- Large surface contact with linen over an angle of 300°
- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts
- Automatic cooldown
- Easy to operate microprocessor: 20 pre-set ironing programs
- Indication of ironing speed and temperature
- Reverse mode possible
- Variable setups for folding
- Built-in feeding and length folding system
- Frequency controlled motor
- Easy to remove lint filters
- Standard anti-static bar
- Folding system requires less maintenance (no ribbons and rolls)
- Electric, gas or steam heating

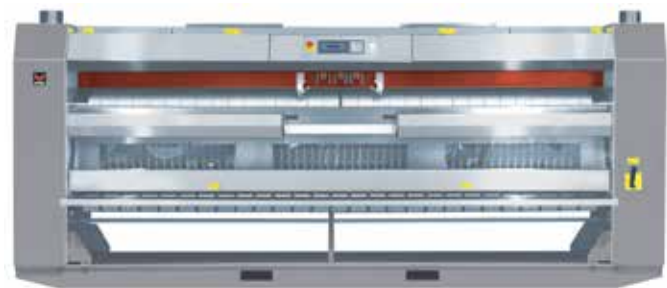

OPTIONS

- Crossfolder and stacker
- Chrome-plated cylinder for a better thermal conduction



ERGONOMICAL
CONSTRUCTION



ONE OPERATOR
ONLY



GLOBAL
IRONING
SOLUTION

THE SMART LAUNDRY PARTNER

	FCIFF 2000 / 500	FCIFF 2600 / 500	FCIFF 3200 / 500
ROLLER DIAMETER (MM)	502	502	502
USEFUL ROLLER LENGTH (MM)	2000	2600	3200
IRONING CAPACITY*			
ELECTRICAL AND GAS HEATING (KG/H)	80	95	120
STEAM HEATING (KG/H)	95	115	145
HEATING			
ELECTRIC (KW)	37,2	54 (208-240) - 70,2 (380-415)	64,8
GAS (KW)	36	52	66
STEAM (KG/H)	49	68	88
MOTOR			
ROLLER MOTOR (KW)	0,37	0,37	0,37
FAN MOTOR (KW)	0,50	0,50	0,50
ROLLER SPEED (M/MIN)	1,5 - 8	1,5 - 8	1,5 - 8
COMPRESSED AIR CONNECTION	exterior: 1/2" - interior: 1/4"	exterior: 1/2" - interior: 1/4"	exterior: 1/2" - interior: 1/4"
ELECTRICAL CONNECTIONS			
	208-240V/50-60Hz/3 380-415V + N/50-60Hz/3 3AC/380-415-N/50,60Hz 3AC/440V/60Hz	208-240V/50-60Hz/3 380-415V + N/50-60Hz/3 3AC/380-415-N/50,60Hz 3AC/440V/60Hz	208-240V/50-60Hz/3 380-415V + N/50-60Hz/3 3AC/380-415-N/50,60Hz 3AC/440V/60Hz
TRANSPORT DATA			
NET WEIGHT (KG)	1690 (E) - 1700 (G) - 1720 (S)	2060 (E) - 2180 (G) - 2100 (S)	2360 (E) - 2400 (G) - 2380 (S)
GROSS WEIGHT (KG)	2040 (E) - 2050 (G) - 2070 (S)	2460 (E) - 2580 (G) - 2500 (S)	2805 (E) - 2845 (G) - 2825 (S)
PACKING DIMENSIONS H X W X D (MM)	2080 x 2985 x 1440	2080 x 3585 x 1440	2080 x 4185 x 1440
CROSSFOLDER NET/GROSS WEIGHT (KG)	-	515 / 760	560 / 810
CROSSFOLDER H X W X D (PACKED) (MM)	-	1400 x 3740 x 1050	1400 x 4340 x 1050
STACKER NET/GROSS WEIGHT (KG)	-	290 / 490	290 / 490
STACKER H X W X D (PACKED) (MM)	-	1584 x 3044 x 1244	1584 x 3044 x 1244

* Data from lab according to standard ISO9398-1. The actual capacity depends on laundry conditions and operators which could be 20% -40% lower.

