


On-Premises I10 Heated Roll Ironer

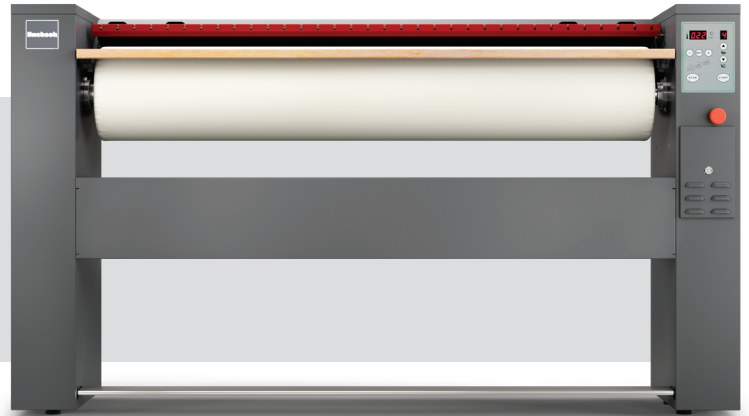


When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.

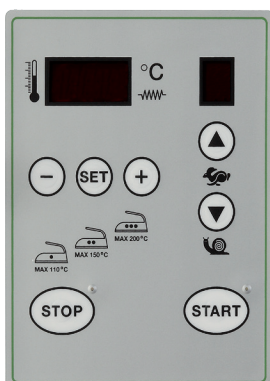


Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises I10 Heated Roll Ironer Specifications

SPECIFICATIONS

MODEL		I10-55
AVAILABLE CONTROL		Microprocessor
ROLL DIAMETER - in (mm)		10 (254)
FINISHING WIDTH - in (mm)		55 (1400)
IRONING SPEED - ft/m (m/m)		7-13 (2-4)
IRONER DIMENSIONS (working position) - in (mm)	Width	70 7/8 (1800)
	Depth	16 1/2 (420)
	Height	39 5/8 (1005)
ROLL MOTOR - HP (kw)		0.29 (0.215)
ROLL EXHAUST DUCT - in (mm)		2.17 (55)
E Heat Input Power - HP (kW)		11.3 (8.4)
ELECTRIC HEATING	Electric Requirements - Circuit Breaker	230/60/3 - 25
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	45 1/4 (1150)
	Depth	74 (1880)
	Height	19 11/16 (500)
NET WEIGHT - lb (kg)		328 (149)
SHIPPING WEIGHT - lb (kg)		287 (130)
AGENCY APPROVALS		ETL

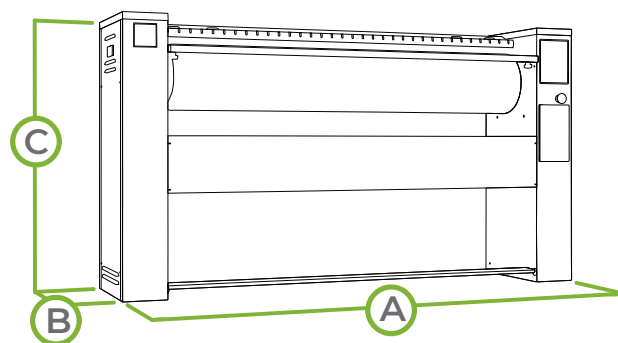

DIMENSIONS

A.	OVERALL WIDTH - in (mm)	70 7/8 (1800)
B.	OVERALL DEPTH - in (mm)	16 1/2 (420)
C.	OVERALL HEIGHT - in (mm)	39 5/8 (1005)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.

On-Premises **FCU13-66** Heated Roll Ironer



When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.




Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises **FCU13-66 Heated Roll Ironer** Specifications

SPECIFICATIONS

MODEL		FCU13-66
AVAILABLE CONTROL		Microprocessor
ROLL DIAMETER - in (mm)		13 (320)
FINISHING WIDTH - in (mm)		66 (1664)
IRONING SPEED - ft/m (m/m)		3-20 (1-6)
IRONER DIMENSIONS (working position) - in (mm)	Width	86 1/2 (2194)
	Depth	30 (765)
	Height	43 3/4 (1110)
ROLL MOTOR - HP (kw)		0.24 (0.18)
ROLL EXHAUST MOTOR - HP (kw)		0.17 (0.125)
ROLL EXHAUST DUCT - in (mm)		6 (150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	24.3
	Electric Requirements - Circuit Breaker	230/60/3 - 80
GAS HEATING	Max. Gas Input - Btu (kW)	85,303 (25)
	Gas Inlet - in (mm)	3/4 (19)
	Electric Requirements - Circuit Breaker	120/60/1 - 15
SHIPPING WIDTH - in (mm)		86 1/4 (2190)
SHIPPING DEPTH - in (mm)		31 1/2 (800)
SHIPPING HEIGHT - in (mm)		49 5/8 (1260)
SHIPPING WEIGHT - lb (kg)	Electric	1069 (485)
	Gas	1025 (465)
NET WEIGHT - lb (kg)	Electric	959 (435)
	Gas	904 (410)
AGENCY APPROVALS		CSA

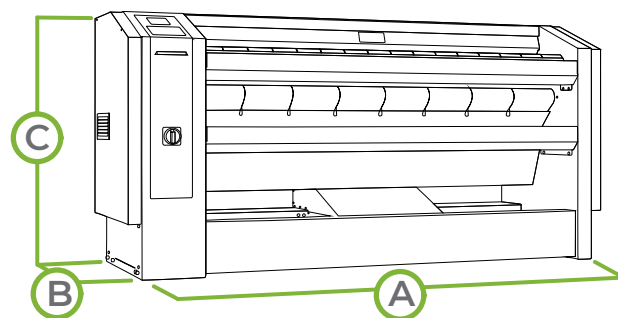


DIMENSIONS

A.	OVERALL WIDTH - in (mm)	86 1/2 (2194)
B.	OVERALL DEPTH - in (mm)	30 (765)
C.	OVERALL HEIGHT - in (mm)	43 3/4 (1110)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.

On-Premises **FCU13-82** Heated Roll Ironer

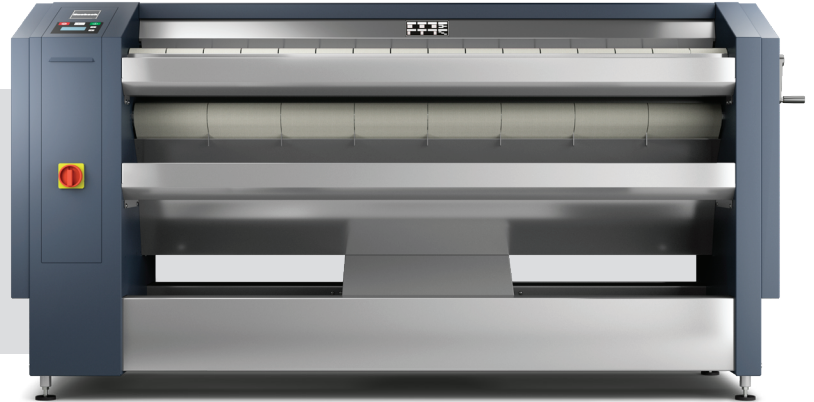


When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.




Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises **FCU13-82 Heated Roll Ironer** Specifications

SPECIFICATIONS

MODEL		FCU13-82
AVAILABLE CONTROL		Microprocessor
ROLL DIAMETER - in (mm)		13 (320)
FINISHING WIDTH - in (mm)		82 (2080)
IRONING SPEED - ft/m (m/m)		3-20 (1-6)
IRONER DIMENSIONS (working position) - in (mm)	Width	102 3/4 (2610)
	Depth	30 (765)
	Height	43 3/4 (1110)
ROLL MOTOR - HP (kw)		0.24 (0.18)
ROLL EXHAUST MOTOR - HP (kw)		0.17 (0.125)
ROLL EXHAUST DUCT - in (mm)		6 (150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	27.9
	Electric Requirements - Circuit Breaker	230/60/3 - 80
GAS HEATING	Max. Gas Input - Btu (kW)	102,364 (30)
	Gas Inlet - in (mm)	3/4 (19)
	Electric Requirements - Circuit Breaker	120/60/1 - 15
SHIPPING WIDTH - in (mm)		102 3/4 (2610)
SHIPPING DEPTH - in (mm)		31 1/2 (800)
SHIPPING HEIGHT - in (mm)		49 5/8 (1260)
SHIPPING WEIGHT - lb (kg)	Electric	1235 (560)
	Gas	1191 (540)
NET WEIGHT - lb (kg)	Electric	1080 (490)
	Gas	1025 (465)
AGENCY APPROVALS		CSA

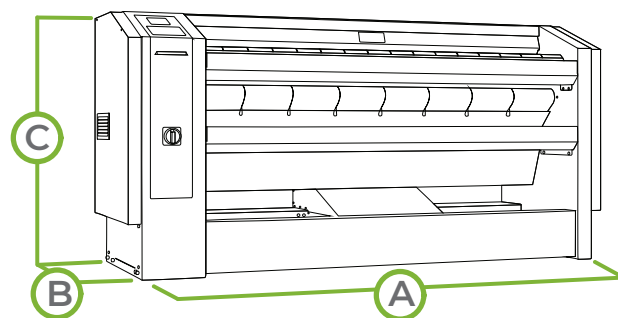

DIMENSIONS

A.	OVERALL WIDTH - in (mm)	102 3/4 (2610)
B.	OVERALL DEPTH - in (mm)	30 (765)
C.	OVERALL HEIGHT - in (mm)	43 3/4 (1110)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.

On-Premises **FCU20-79** Heated Roll Ironer



When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.




Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises **FCU20-79 Heated Roll Ironer** Specifications

SPECIFICATIONS

MODEL		FCU20-79
AVAILABLE CONTROL		Microprocessor
ROLL DIAMETER - in (mm)		20 (502)
FINISHING WIDTH - in (mm)		79 (2000)
IRONING SPEED - ft/m (m/m)		5-26 (1.5-8)
IRONER DIMENSIONS (working position) - in (mm)	Width	108 1/4 (2750)
	Depth	41 1/2 (1052)
	Height	48 1/2 (1232)
ROLL MOTOR - HP (kw)		0.50 (0.37)
ROLL EXHAUST MOTOR - HP (kw)		0.34 (0.255)
ROLL EXHAUST DUCT - in (mm)		6 (150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	37.2
	Electric Requirements - Circuit Breaker	230/60/3 - 125
GAS HEATING	Max. Gas Input - Btu (kW)	122,837 (36)
	Gas Inlet - in (mm)	3/4 (19)
	Electric Requirements - Circuit Breaker	230/60/3 - 15
SHIPPING WIDTH - in (mm)		113 1/2 (2885)
SHIPPING DEPTH - in (mm)		43 (1095)
SHIPPING HEIGHT - in (mm)		59 (1550)
SHIPPING WEIGHT - lb (kg)	Electric	2833 (1285)
	Gas	3120 (1415)
NET WEIGHT - lb (kg)	Electric	2249 (1020)
	Gas	2535 (1150)
AGENCY APPROVALS		CSA

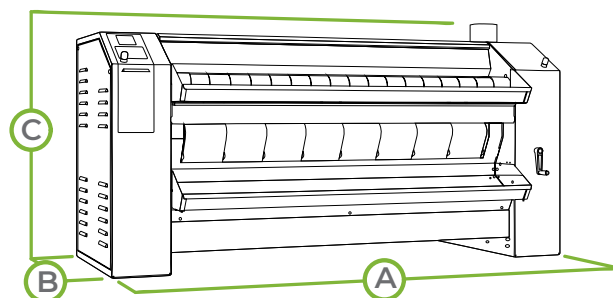


DIMENSIONS

A.	OVERALL WIDTH - in (mm)	108 1/4 (2750)
B.	OVERALL DEPTH - in (mm)	41 1/2 (1052)
C.	OVERALL HEIGHT - in (mm)	48 1/2 (1232)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.

On-Premises **FCU20-102** Heated Roll Ironer

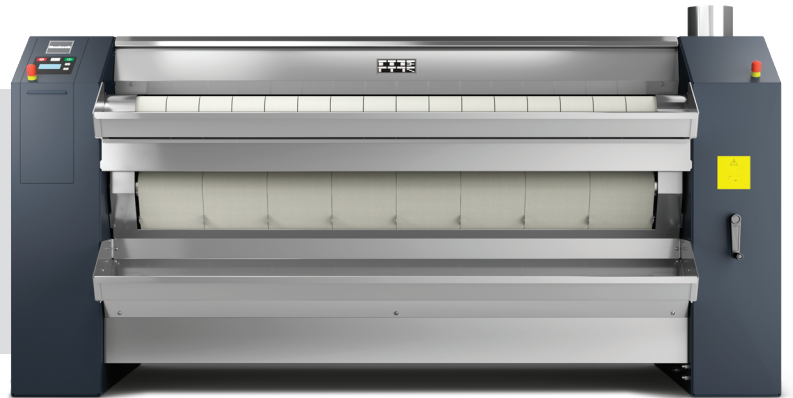


When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.




Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises **FCU20-102 Heated Roll Ironer** Specifications

SPECIFICATIONS		
MODEL		FCU20-102
AVAILABLE CONTROL		Microprocessor
ROLL DIAMETER - in (mm)		20 (502)
FINISHING WIDTH - in (mm)		102 (2600)
IRONING SPEED - ft/m (m/m)		5-26 (1.5-8)
IRONER DIMENSIONS (working position) - in (mm)	Width	132 (3350)
	Depth	42 3/4 (1087)
	Height	48 1/2 (1232)
ROLL MOTOR - HP (kw)		0.50 (0.37)
ROLL EXHAUST MOTOR - HP (kw)		0.34 (2 x 0.255)
ROLL EXHAUST DUCT - in (mm)		6 (2 x 150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	54.0
	Electric Requirements - Circuit Breaker	230/60/3 - 175
GAS HEATING	Max. Gas Input - Btu (kW)	177,431 (52)
	Gas Inlet - in (mm)	3/4 (19)
	Electric Requirements - Circuit Breaker	230/60/3 - 15
SHIPPING WIDTH - in (mm)		137 1/4 (3485)
SHIPPING DEPTH - in (mm)		43 (1095)
SHIPPING HEIGHT - in (mm)		59 (1550)
SHIPPING WEIGHT - lb (kg)	Electric	3483 (1580)
	Gas	3549 (1610)
NET WEIGHT - lb (kg)	Electric	2778 (1260)
	Gas	2844 (1290)
AGENCY APPROVALS		CSA

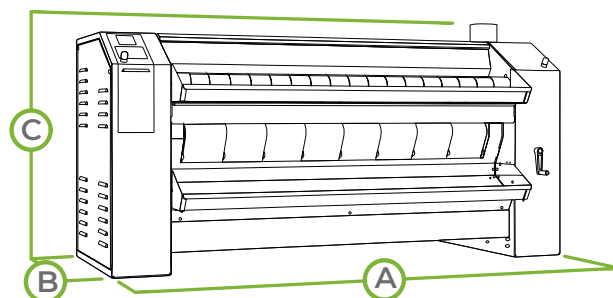

DIMENSIONS		
A.	OVERALL WIDTH - in (mm)	132 (3350)
B.	OVERALL DEPTH - in (mm)	42 3/4 (1087)
C.	OVERALL HEIGHT - in (mm)	48 1/2 (1232)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.

On-Premises **FCU20-126** Heated Roll Ironer



When only the highest quality results will do, our heat-ed-cylinder finishers deliver. They are equipped with a frequency-controlled motor, suspended roll and Nomex® ironing belts to deliver top-of-the-industry results.

Quality

Huebsch Heated Roll Ironers are offered in finished widths of 55 (1400 mm), 66 (1664 mm), 79 (2000 mm), 82 (2080 mm), 102 (2600 mm) and 126 (3200 mm) inches meaning there's a size to fit the needs of any size laundry.

Efficient

Thick, polished-steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.




Microprocessor Control

Huebsch's versatile Microprocessor Control enables you to store temperature and speed settings to ensure consistent, top-quality results. Temperatures can be set up to 355°F and the unit offers multiple speed settings.

On-Premises **FCU20-126 Heated Roll Ironer** Specifications

SPECIFICATIONS		
MODELS		FCU20-126
AVAILABLE CONTROLS		Microprocessor
ROLL DIAMETER - in (mm)		20 (502)
FINISHING WIDTH - in (mm)		126 (3200)
IRONING SPEED - ft/m (m/m)		5-26 (1.5-8)
IRONER DIMENSIONS (working position) - in (mm)	Width	155 1/2 (3950)
	Depth	42 3/4 (1087)
	Height	48 1/2 (1232)
ROLL MOTOR - HP (kw)		0.50 (0.37)
ROLL EXHAUST MOTOR - HP (kw)		0.34 (2 x 0.255)
ROLL EXHAUST DUCT - in (mm)		6 (2 x 150)
ELECTRIC HEATING	E Heat Input Power - HP (kW)	64.8
	Electric Requirements - Circuit Breaker	230/60/3 - 225
GAS HEATING	Max. Gas Input - Btu (kW)	255,201 (66)
	Gas Inlet - in (mm)	3/4 (19)
	Electric Requirements - Circuit Breaker	230/60/3 - 15
SHIPPING WIDTH - in (mm)		160 3/4 (4085)
SHIPPING DEPTH - in (mm)		43 (1095)
SHIPPING HEIGHT - in (mm)		59 (1550)
SHIPPING WEIGHT - lb (kg)	Electric	4034 (1830)
	Gas	4299 (1950)
NET WEIGHT - lb (kg)	Electric	3241 (1470)
	Gas	3505 (1590)
AGENCY APPROVALS		CSA

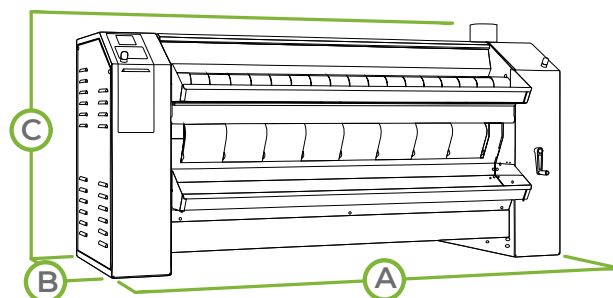


DIMENSIONS		
A.	OVERALL WIDTH - in (mm)	155 1/2 (3950)
B.	OVERALL DEPTH - in (mm)	42 3/4 (1087)
C.	OVERALL HEIGHT - in (mm)	48 1/2 (1232)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems has been registered to ISO 9001.



COMMERCIAL FLATWORK FINISHERS

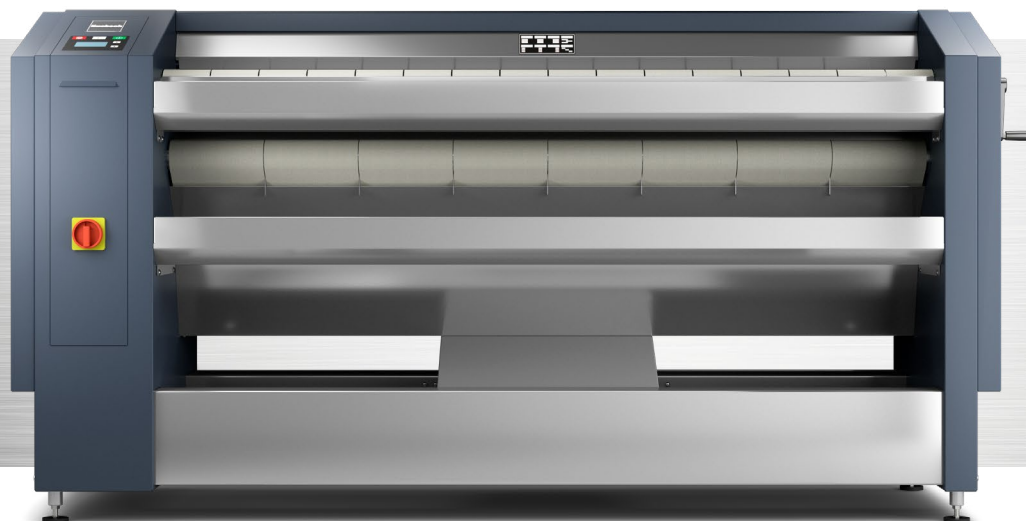

QUALITY BY DESIGN

Our heated cylinder finishers are equipped with a frequency-controlled motor, suspended roll and Nomex ironing belts to deliver top-of-the-industry results.


THE RIGHT SIZES

Huebsch® flatwork finishers are offered in finished widths of 55, 66, 79, 82, 102 and 126 meaning there's a size to fit the needs of any size laundry.

EXCELLENT EFFICIENCY

Thick, polished steel cylinders maintain even heat and help make the finishers highly efficient. A totally enclosed cabinet also contributes to its energy efficiency.

MICROPROCESSOR CONTROL



Huebsch's versatile microprocessor control enables you to store temperature and speed settings to ensure consistent, top quality results. Temperatures can be set up to 355 degrees, while there are multiple speed settings.

FLATWORK FINISHER

Models	I10	FCU13X66	FCU13X82	FCU20X79	FCU20X102	FCU20X126
Roll Diameter - in (mm)	10 (254)	13 (320)	13 (320)	20 (502)	20 (502)	20 (502)
Finishing Width - in (mm)	55 (1400)	66 (1664)	82 (2080)	79 (2000)	102 (2600)	126 (3200)
Ironing Speed - ft/m (m/m)	7-13 (2-4)	3-20 (1-6)	3-20 (1-6)	5-26 (1.5-8)	5-26 (1.5-8)	5-26 (1.5-8)
Ironer Dimensions (working position)						
Width - in (mm)	70.875 (1800)	86.5 (2194)	102.75 (2610)	108.25 (2750)	132 (3350)	155.5 (3950)
Depth - in (mm)	16.5 (420)	30 (765)	30 (765)	41.5 (1052)	42.75 (1087)	42.75 (1087)
Height - in (mm)	39.63 (1005)	43.75 (1110)	43.75 (1110)	48.5 (1232)	48.5 (1232)	48.5 (1232)
Roll Motor - HP (kW)	0.29 (0.215)	0.24 (.18)	0.24 (.18)	0.50 (.37)	0.50 (.37)	0.50 (.37)
Roll Exhaust Motor - HP (kW)	N/A	0.17 (0.125)	0.17 (0.125)	0.34 (0.255)	0.34 (2 x 0.255)	0.34 (2 x 0.255)
Roll Exhaust Duct - in (mm)	2.17 (55)	6 (150)	6 (150)	6 (150)	6 (2 x 150)	6 (2 x 150)
Electric Heating						
E heat input power - HP (kW)	11.3 (8.4)	32.6 (24.3)	37.4 (27.9)	49.9 (37.2)	72.4 (54.0)	86.9 (64.8)
Electrical Requirements - Circuit Breaker	230/60/3 - 25	230/60/3 • 80	230/60/3 • 80			
Gas Heating						
Maximum Gas Input - Btu (kW)	N/A	85,303 (25)	102,364 (30)	122,837 (36)	177,431 (52)	225,201 (66)
Gas Inlet - in (mm)	N/A	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)
Electrical Requirements - Circuit Breaker	N/A	120/60/1 • 15	120/60/1 • 15	230/60/3 • 15	230/60/3 • 15	230/60/3 • 15
Shipping Dimensions						
Height - in (mm)	45 1/4 (1150)	49.63 (1260)	49.63 (1260)	59 (1550)	59 (1550)	59 (1550)
Width - in (mm)	74 (1880)	86.25 (2190)	102.75 (2610)	113.5 (2885)	137.25 (3485)	160.75 (4085)
Depth - in (mm)	19.69 (500)	31.5 (800)	31.5 (800)	43 (1095)	43 (1095)	43 (1095)
Weight - lb (kg)	Electric 328 (149) Gas N/A	1069 (485) 1025 (465)	1235 (560) 1191 (540)	2833 (1285) 3120 (1415)	3483 (1580) 3549 (1610)	4034 (1830) 4299 (1950)
Net Weight - lb (kg)	Electric 287 (130) Gas N/A	959 (435) 904 (410)	1080 (490) 1025 (465)	2249 (1020) 2535 (1150)	2778 (1260) 2844 (1290)	3241 (1470) 3505 (1590)
Approvals	ETL	CSA	CSA	CSA	CSA	CSA

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
 Shepard Street
 Ripon, WI 54971
 1-800-553-5120
 huebsch.com

AH18-0035

